


OPTION CODE	INPUT STATUS	CONTACT STATUS	DESCRIPTION	OPTION CODE	LAMP STATUS	CONTACT STATUS	DESCRIPTION
1BE	NORMAL		FOLLOWS CONTACT OR TEST PUSHBUTTON	3BE	OFF		ON WHEN- EVER LAMP IS ON
	ALARM				FF/SF/STDY		
	TEST				TEST		
4BE	NORMAL		FOLLOWS CONTACT ONLY	5BE	OFF		ON WHEN LAMP IS ON DUE TO ALARM INPUT
	ALARM				FF/SF/STDY		
	TEST				OFF		
6BE	NORMAL		ON ONLY WHEN HORN IS ACTIVE				
	ALARM						
	ACK						
	TEST						

NOTES:

- THIS OPTION IS AVAILABLE ONLY FOR POINTS WITH "DM" OR "DB" INPUTS.
- TYPICAL CARD W/REMOVABLE JUMPERS (DE/EN) SHOWN IN DE POSITION (RELAYS "DE-ENERGIZED IN NORMAL"), FOR RELAY "ENERGIZED IN NORMAL", MOVE JUMPERS J52 AND J53 (LOWER POINT) TO THE LEFT (EN), J48 AND J49 (UPPER POINT) DOWN (EN), THIS REVERSES CONTACT STATUS SHOWN IN THE CHART.

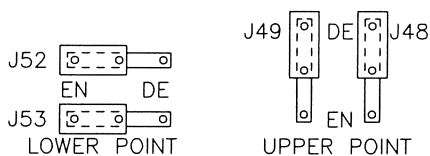

- CONTACT RATING:
5 AMP @ 250VAC OR 28VDC RESISTIVE,
500mA @ 120VAC OR 28VDC LAMP LOAD,
500mA @ 125VDC RESISTIVE LOAD ONLY,
125mA @ 125VDC LAMP LOAD ONLY.
- IF TRANSIENT SUPPRESSION FOR RELAY CONTACT WIRING IS REQUIRED, INSTALL (OPTIONAL) 90ATB14 ACROSS ACTIVE CONTACTS. (130VAC MAX.)
- FOR REFERENCE SEE OUTPUT OPTIONS, DRAWING 92900-2.
- WHEN USED IN CLASS I DIVISION 2 APPLICATIONS
WARNING: EXPOSURE TO SOME CHEMICALS MAY DEGRADE THE SEALING PROPERTIES. THE RELAY SHOULD BE INSPECTED PERIODICALLY FOR SIGN OF ATTACK (CRAZING, SWELLING, OR DEFORMATION). REPLACE PC BOARD IF DEGRADATION IS OBSERVED. RELAY MANUFACTURER & P/N: TAIKO FXE-24.

Warning: Used on FM approved equipment. drawing must be submitted to FM whenever its revision level changes. NO substitutions without engineering approval.
Ref. FM JI# 0J9A0.AX & 2Q8A3.AX

SEE SEQUENCE CARD MODEL NUMBER FOR OPTION CODE ORDERED



PANALARM


1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.
PHONE: 1-630-231-5900 FAX: 1-630-231-4502

TOLERANCE UNLESS SPECIFIED

INCHES	MILLIMETERS
.X = .040	X.0 = 1.0
.XX = .015	0.X = 0.4
.XXX = .005	0.XX = 0.1
ANGLES	±0°30'

INCH
(MM)

THIRD ANGLE PROJECTION



AMETEK

REV	ECN NO.	BY	APPD	DATE	SCALE	NONE	© 1981
07	10464	SK	JT	06/13/90	DRWN BY	TL / SK	
08	11486-02C	SK	JM	10/19/95	APPD	ARF	
09	11872	SK	SJK	04/12/00	DATE	02/18/81	
10	6044	SK	<i>Miz</i>	4/18/03	92450-_B_-1-10-01.dwg		
					SHEET 1 OF 1		

WIRING DIAGRAM,
FOR FORM "B" CONTACT RELAY
OUTPUT

DWG. NO. 92450-*B*-1

-A-