
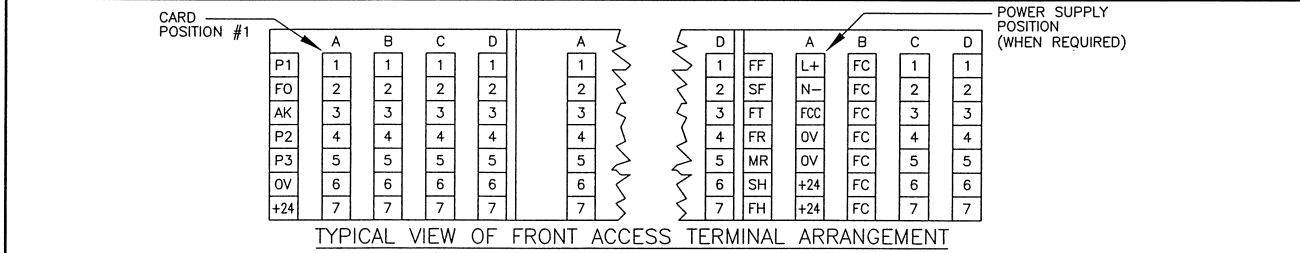
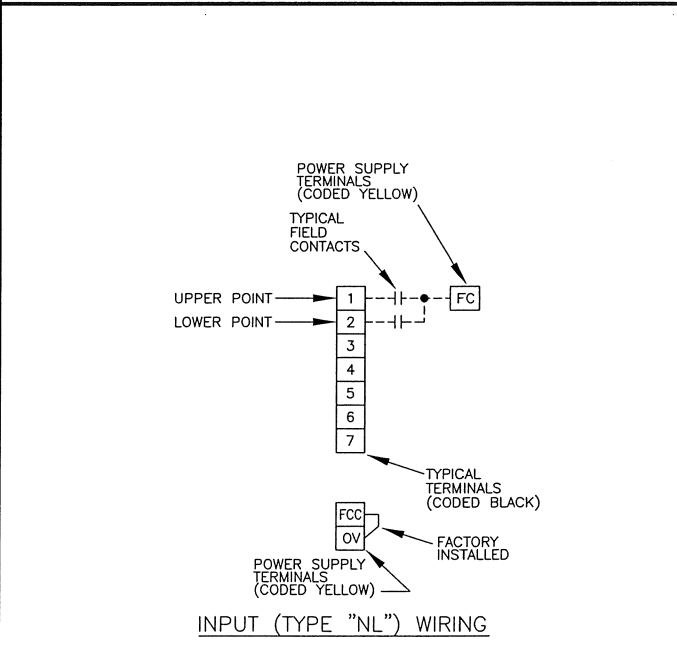


- NOTES:
- 1. NORMAL FLASHER LOCATION: LOWER RIGHT MODULE (FRONT VIEW). IN SYSTEMS WITH INTEGRAL POWER SUPPLY UNIT, NORMAL FLASHER LOCATION IS IN SLOT (D) OF ADJACENT MODULE. FLASHER CAPACITY: 300 POINTS.
 - 2. "USER" MAIN BUS BLOCKS PROVIDED ON ALL EXCEPT REMOTE LOGIC CHASSIS, ONE ROW HIGH CABINETS AND 94CA22 CABINETS. REFER TO DRAWING 90900-21.
 - 3. TOTAL CURRENT FOR COMBINED REMOTE AND INTEGRAL LAMPS NOT TO EXCEED 320mA PER POINT AT 24VDC. REMOTE LAMP OUTPUT IS NOT AVAILABLE WHEN TERMINALS "6" AND "7" IS USED FOR ANOTHER FUNCTION.
 - 4. TYPICAL CARD WITH REMOVABLE JUMPER (N.O./N.C.) SHOWN IN POSITION N.C.
 - UP = N.C.
 - DOWN = N.O.
 - 5. DASHED LINES INDICATE CUSTOMER FIELD WIRING.

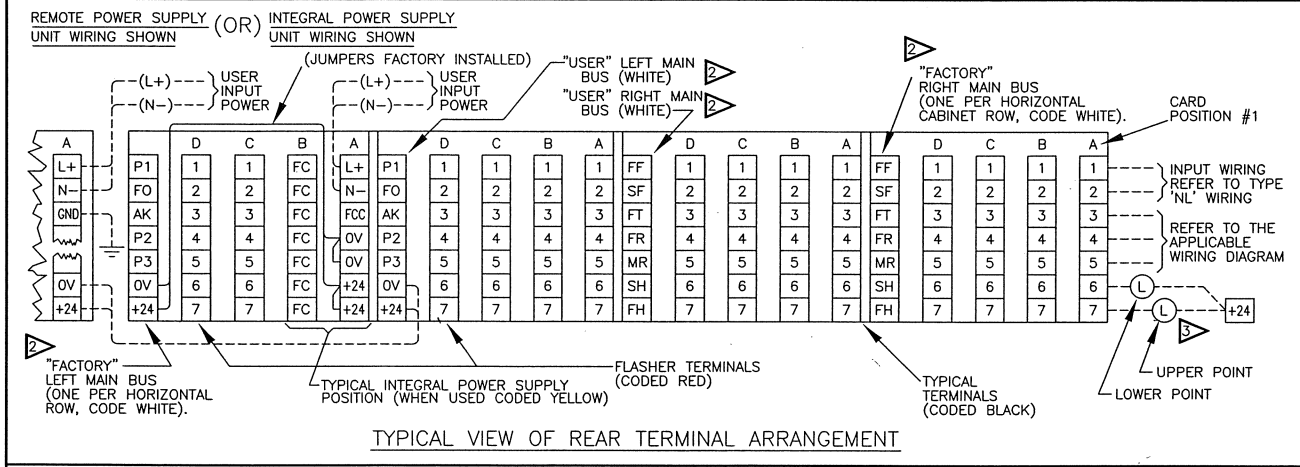

REV	ECN NO.	BY	APPD	DATE	MATERIAL:	
05	9300-41	MR	RCV	09/04/86	FINISH:	
06	9550	LJ	PG	06/04/87	USED ON/REF. DWG	DESCRIPTION
07	11872	SK	MAJ	6/15/01		

TOL. UNLESS SPECIFIED

INCHES
 .X = .015
 .XX = .010
 .XXX = .005

MILLIMETERS
 X.0 = 1.0
 0.X = 0.4
 0.XX = 0.1

ANGLES ±0°30'

SCALE INCH (MM)
 NONE

PANALARM

DOWN BY LJ / SK

APPD/DATE AFR 02/18/81

THIRD ANGLE PROJECTION

AMETEK

PANALARM 1725 WESTERN DRIVE, WEST CHICAGO, ILL., 60185, U.S.A.
 PHONE: 1-630-231-5900 FAX: 1-630-231-4502

TERMINAL ARRANGMENT OF 94 STYLE MODULE
 (4 TERMINAL BLOCKS PER MODULE) (NO LAMP BOX)
 WITH 1,2,3, OR 4 92* CARDS(S) (2 POINT PER CARD) USING TYPE "NL" INPUTS

SHEET 1 OF 1 DWG. NO. 94400-20-1 -B-